




Chrysler 68RFE 4th Clutch - Stage 2 Hi-Performance OE Replacement Kit

ALTO PART # 128758D

Alto # 128758D POWERPACK® CONTENTS:

- (3) 128744-230 Red Eagle® Friction Plates
- (3) 128705K250 Kolene® Steel Plates
- (1) 128765-500 Pressure Plate

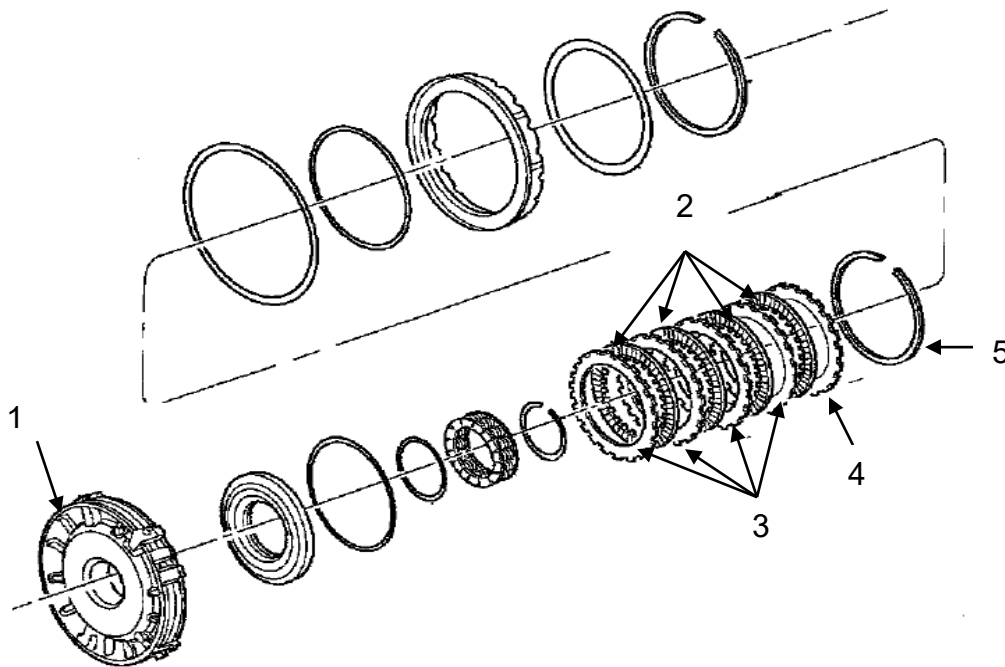

INSTALLATION INSTRUCTIONS

Stack-up is same as OE:

Install the Alto Red Eagle® frictions (3) and Kolene® steel plates (3), starting with a steel plate and ending with a friction plate into the 4C housing (1)

Install the top pressure plate (4)

Install the Flat 4C selective snap-ring (5) into the 4C housing

Check clutch pack clearance using a feeler gauge in four places between the Pressure plate and the snap ring. Clearance should be 0.770 to 1.390mm (.030" to .055")

Adjustment made by selective snap rings available from dealer.

(For the best results always soak the frictions in recommended ATF for at least 20 minutes)